
DATA SHEET

siegling transilon
conveyor and processing belts

Sustainable Solutions

Product Data Sheet

RE 8/2 U0/V5 BMB green

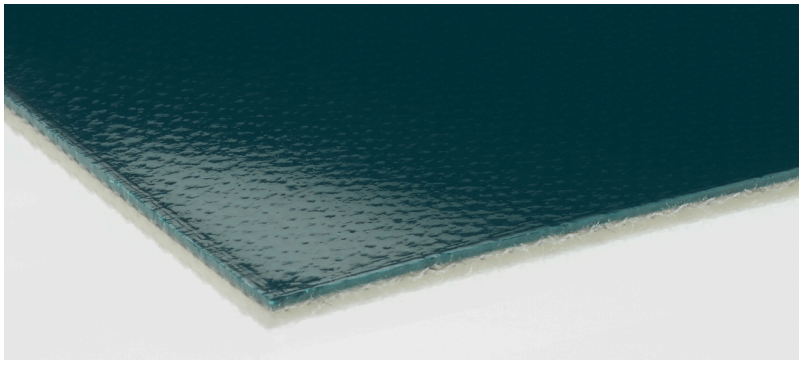

Art. No.: 901021 M 1:2

Applications

General material handling	Belt with corrugated sidewalls; Checkweighers; Horizontal conveying; Packaging machines
Logistics	Telescopic conveyor
Nonwoven	Coating and drying machines; Machinery for unravelling and preparing fibres; Needle machines
Paper & corrugated cardboard industry	Cross-cutter (paper, cardbord, foils)
Printing industry	Finishing, post press, mail room, discharge, cross-cutter
Textiles	Laundry folders
Tire/Rubber	Quality control / storage
Wood industry	Board conveying; Fibre/chip bins ; Finishing (feeding, veneering, laminating); Material conveying belt
Yarn Production	Bale and blending opener (feeder belts); Blending opener; Packaging lines; Winder: Empty tube/ cops conveyor

RE 8/2 U0/V5 BMB green

Order information

Article number	901021
Suitable for corrugated side walls	Yes
Standard delivery width	3050 mm / 120.08 in
Longitudinal seam possible	Yes

Construction

Top face material	Polyvinyl chloride, bio-based
Surface pattern	Smooth
Coating thickness	0.5 mm / 0.02 in
Color	Green (~RAL 5020)
Driving face material	Polyurethane impregnation
Surface pattern	Fabric
Color	Transparent
Tension member material	Laterally stiff fabric of recycled polyester warp and weft
Number of fabric plies	2
Driving face weave	Twill weave, low-noise

Sustainability

Fabric made of recycled products	Resource-friendly raw materials; Regenerative waste utilization; Positive contribution to life cycle/carbon emissions; Supports your sustainability concept
Coating made from biomass-balanced raw materials of bio-based and recycled origin	Resource-friendly raw materials; Regenerative waste utilization; Positive contribution to life cycle/carbon emissions; Supports your sustainability concept
Savings CO_2 [kg/m²]	On request

RE 8/2 U0/V5 BMB green

Technical data

Total thickness	2.1 mm ± 0.1 0.083 in ± 0.004
Weight	2.5 kg/m² ± 0.15 0.512 lbs/ft² ± 0.031
k1% value relaxed (effective pull at 1% elongation), established in line with ISO 21181:2005	7.5 N/mm / 42.83 lbf/in
Recommended Elongation at fitting min.	0.3 %
Recommended Elongation at fitting max.	1 %
Friction coefficient of driving face against steel panel according ISO 21182	0.19
Permissible operating temperature	-10/70 °C, for a short time 90 °C 14/158 °F, for a short time 194 °F
Hardness of top face coating as per DIN 53505 (Shore A)	66

Properties

Lateral stiffness	Laterally stiff
Troughable	No
Suitable for accumulation	No
Inclined conveying	Limited
Suitable for knife edges	No
Suitable for curves	No
Flame-retardant	No
Noise development	Low noise
Coating/fabric exceptionally cut resistant	Yes
Belt support	Slider bed (support rollers possible)

Food properties

	Not suitable for the transport of unpacked food according (EU) 10/2011 and (EC) 1935/2004, FDA 21CFR or MHLW 370.

RE 8/2 U0/V5 BMB green

Electrostatic properties

Antistatic	Belt material with an electrically conductive antistatic agent. Volume resistance (RDi) in longitudinal direction parallel to plane of belt < 3 x 10^8 Ω. Measurement according DIN EN ISO 21178.

Fabrication

Belt edge sealing	Smartseal; Proseal
Suitable for corrugated side walls	Yes
Profiles on top face	Yes
Profiles on underside	Yes
Mechanical fasteners	KS; CS-05; HS-22; HS-21

Minimum drum diameter

Z- splice - 70 x 11,5 mm, counter-bending	40 mm / 1.6 in
Stepped Z-splice - 35 x 11,5 mm, bending	40 mm / 1.6 in
Stepped Z-splice - 35 x 11,5 mm, counter-bending	40 mm / 1.6 in
Z- splice - 70 x 11,5 mm, bending	40 mm / 1.6 in

Remarks

Chemical resistance	V

The physical data in this data sheet is approximate, can alter depending on production environments and was established at standard ambient conditions (23°C/73°F, 50% relative humidity) in accordance with DIN 50014/ISO 554. Fluctuations in climate can cause variations. See our brochure “Technical Information 1” no. 317 which shows the types of belts that can be supplied and the manufacturing tolerances. Customised types require written confirmation.

Date of last change: 4/30/2026 12:03:38 PM